

# P3500I HAU

Compact & Lightweight




## FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box

## POWERRUSH

MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS. Powerrush increases electrical current upon demand, above rated output when starting electric motors.

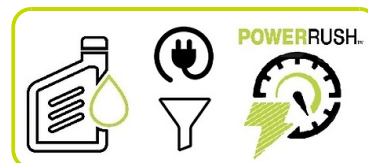

## PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	3300
Rated Power	Watts	3000



## Engine


Engine Brand	Pramac	
Type	OHV	
Exhaust emission level	Stage V	
Operating Speed Nominal	rpm	Variable
Fuel	Petrol	
Starting Systems	Electric (+Recoil)	
Oil capacity	l	0.6
Low Oil Shutdown	√	

## Alternator

Voltage regulation system	Inverter
---------------------------	----------

## Dimensional data

Length	(L) mm	601
Width	(W) mm	458
Height	(H) mm	552
Dry weight	kg	49.5
Carton box dimension LxWxH	mm	625x505x580

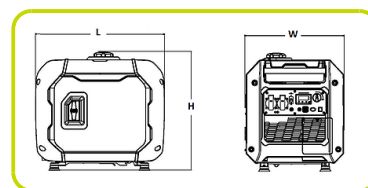

## Autonomy

Fuel tank capacity	10	
Fuel consumption 75%	l/h	1.6
Running time 75%	h	6



## Noise level

Guaranteed noise level (LWA)	dB(A)	88
Noise pressure level @ 7 m	dB(A)	61

## GENSET CONTROL

### COMMANDS

- Selector switch: O/I | Air choke Valve | Power Button
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

### INSTRUMENTATION:

- Outputting energy (light - Green)
- Overloading and Oil alarming (light - Red)
- Voltmeter / Hourmeter / Frequency meter / Fuel gauge
- Parallel kit receptacles

### PROTECTIONS

- Overload; Oil Guard; Short Circuit; Overvoltage; Overtemperature
- Protection Control panel IP 44

### OUTPUT:

- n°2 USB DC 5V 2A

### SOCKET TYPE

AS/NZS 3112 15A 250V	2
----------------------	---



The information is aligned with the Data file at the time of download. Printed on 27/06/2022 (ID 15534)

©2022 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

